ANCHORS AND RELATED

PAW S RIGGING PLATE

- For organizing the belay and creating a system with multiple anchors
- Three anchor point holes
- Helps to equalize loads
- Lightweight and rugged: made of aluminum

Specifications

Weight: 55 g

Breaking strength: 36 kN Material(s): aluminum Certification(s): CE, NFPA



Brand: Petzl, made in France

Model: PAW S

PAW M RIGGING PLATE

- For easily organizing the work station and creating multi-anchor systems
- 19 mm holes allow the locking sleeves of most carabiners to pass through
- Made of aluminum: excellent strength-toweight ratio with Five anchor point holes



Brand: Petzl, made in France

Model: PAW M

Specifications

Material(s): aluminum

Weight: 210 g

Breaking strength: 36 kN

Certification(s): CE, NFPA 1983 General Use

PAW L RIGGING PLATE

- The PAW rigging plate is for organizing the work station & creating multi-anchor systems.
- 19 mm holes allow the locking sleeves of most carabiners to pass through
- Made of aluminum: excellent strength-to-

- weight ratio with seven anchor point holes

Specifications

Material(s): aluminum

Weight: 350 g

Breaking strength: 36 kN

Certification(s): CE, NFPA 1983 General Use



Brand: Petzl. made in France

Model: PAW L

FIXE ANCHOR STRAP

- Forged steel D-rings on the ends
- Available in three lengths: 100, 150 and 200 cm

Specifications

Breaking strength: 22 kN

Certification(s): CE EN 795 B, NFPA 1983

General Use

Length	100 cm	150 cm	200 cm
Weight	365 g	425 g	485 g



Brand: Petzl, made in France **Model:** Connexion Fixe



ADJUSTABLE ANCHOR STRAP


- Adjustment buckle allows strap to be adjusted between 80 and 130 cm
- Forged steel D-rings on the ends

Specifications

- Breaking strength: 22 kN

- Certification(s): CE EN 795 B, NFPA 1983

General Use
- Length: 80-130 cm
- Weight: 480g

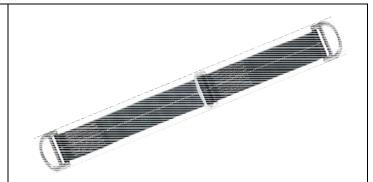

Brand: Petzl, made in France **Model:** Connexion Vario

RAPID ADJUSTMENT ANCHOR STRAP

- Rapid adjustment buckle on end allows strap to be adjusted between 20 and 150 cm
- Forged steel D-rings on the ends

Specifications

- Breaking strength: 18 kN

- Certification(s): CE EN 795 B, NFPA 1983

Technical Use
- Length: 20-150cm
- Weight: 440g



Brand: Petzl, made in France **Model:** Connexion Fast

SWIVEL SMALL

- The SWIVEL Small is compact and prevents the rope from twisting when the load is turning. Sealed ball bearings offer excellent performance and reliability. Prevents the rope from twisting when the load is turning. Excellent performance and reliability due to maintenance-free sealed ball-bearings.
- Compact and designed for one-person loads

Specifications

- Breaking strength: 23 Kn

- Weight: 95 g

- Certification(s): CE, EAC, NFPA 1983

Technical Use



Brand: Petzl, made in France

Model: Swivel S

SWIVEL LARGE

- The SWIVEL Large prevents the rope from twisting when the load is turning. Sealed ball bearings offer excellent performance and reliability. Prevents the rope from twisting when the load is turning. Excellent performance and reliability due to maintenance-free sealed ball-bearings.
- Designed for two-person loads, up to three connectors can be attached in the ends

Specifications

- Weight: 150 g

- Breaking strength: 36 Kn

- Certification(s): CE, EAC, NFPA 1983

General Use



Brand: Petzl, made in France

Model: Swivel L

TREESBEE ANCHOR STRAP

- Protects the tree and improves rope glide at the anchor
- Can be retrieved from the ground
- Wide webbing limits twisting
- Triple thickness of termination on large ring side makes the webbing more rigid during retrieval. Terminations easy to identify with color coding.
- Strap with large diameter ring and small ring for ropes with spliced terminations (the splice goes through the small ring)

Specifications

Length: 110 cmWeight: 240 g

Breaking strength: 23 kNCertification(s): CE EN 795 B



Brand: Petzl, made in France

Model: Treesbee


TREESBEE SCREWLINK ANCHOR STRAP

- Protects the tree and improves rope glide at the anchor. Can be retrieved from the ground.
- Wide webbing limits twisting
- Triple thickness of termination on large ring side makes the webbing more rigid during retrieval. Terminations easy to identify with color coding.
- Strap with large diameter ring and quick link (triangle) for ropes with sewn terminations (the link opens to let the sewn termination through)

Specifications

Length: 110 cmWeight: 295 g

Breaking strength: 15 KnCertification(s): CE EN 795 B



Brand: Petzl, made in France **Model:** Treesbee Screwlink

QUICK ADJUSTMENT ANCHOR

- Allows quick installation of an adjustable anchor that is longer than two meters
- The self-locking device allows easy adjustment of the length and tension at the anchor point (make a mule knot on the GRILLON to lock the anchor) Semi-static rope, resistant to aging and abrasion
- Sewn terminations on both ends with plastic sheath to keep the connector in position and protect the rope from abrasion. (connector not included):

Specifications

- Certification(s): CE EN 795 B, EAC

Length	2 m	3 m	4 m	5 m
Weight	435 g	515 g	595 g	675 g



Brand: Petzl, made in France **Model:** Grillon Anchor